


## Thick Film S-Band Low Pass Filter


The **ims** IMF Series low pass filters (LPF) are for engineers who need a harmonic filter of robust and precision design. These filters have been successfully tested to input power levels exceeding 20W. Part-to-part performance repeatability is excellent in high or low volumes.



The low pass filter delivers the performance of a custom designed filter, but with the price and delivery closer to an off-the-shelf solution. Circuit construction is lumped/distributed surface mountable microstrip on alumina, enabling higher performance and higher power handling than an equivalent off-the-shelf packaged device or lumped element equivalent.

IMF2292	Specification
Passband:	up to 2.5 GHz
2nd, 3rd harmonic rejection:	25 dB minimum
Dimensions:	.444" x .324" x .035" max
Insertion Loss:	0.4 dB or better
VSWR:	1.1:1 by design*
Input Power Rating:	20W with a 100 deg. C baseplate
50Ω Solderable Connections	

\*.01dB Passband ripple design

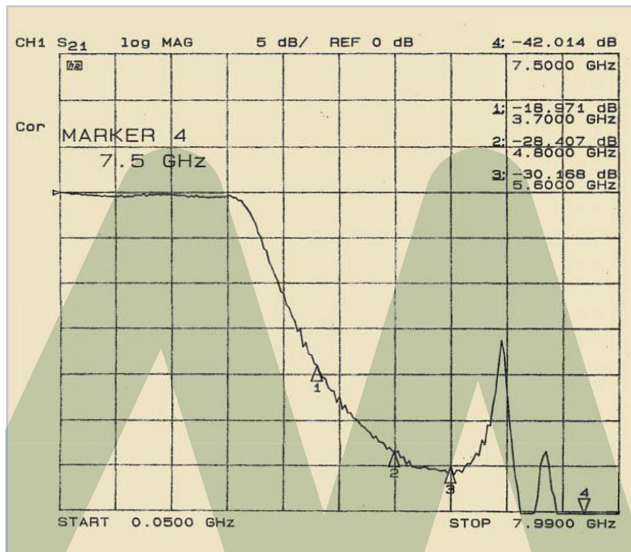

The curve illustrates the performance of the IMF2292 filter in a matched 50Ω alumina system.

**Contact ims today and let us show you how we can help you reach your design goals.**

**International Manufacturing Services, Inc.**

50 Schoolhouse Ln., Portsmouth RI 02871 USA

Tel (401) 683-9700 • Fax (401) 683-5571 • e-mail: [ims@ims-resistors.com](mailto:ims@ims-resistors.com) • [www.ims-resistors.com](http://www.ims-resistors.com)