


IPS Series Four Way

ims

12dB Thick Film Resistive Power Splitter

The IPS series 12dB 50Ω power splitter is a simple, low-profile, space saving alternative to softboard solutions. They are ideal for nearly any low to medium power RF and Microwave application. Circuit construction is SMT on alumina and the device is fully symmetric. A microstrip version of this device is also available by contacting factory.




Thick Film

IPS2522

Terminal Style: Wraparound
Terminal Material: Platinum Silver
Attachment: Solder or Epoxy

Item	Specification
Power Split (by design):	12dB Each Output
Dimensions:	0.295" x 0.287" x 0.035"Max1
Amplitude Balance:	±0.7dB
Operating Frequency:	DC to 7GHz2
Input Power Rating3:	3W
Nominal VSWR:	1.3:1 Max
Impedance:	50Ω
Architecture:	Thick Film on 96% Alumina

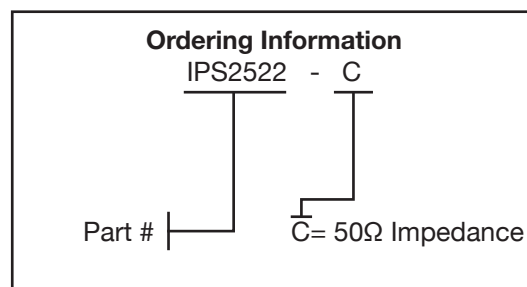

1. Contact factory for detailed dimensional information
2. Proper implementation of RF design principles are required to assure optimal performance.
3. Baseplate temperature 100°C or less

International Manufacturing Services, Inc.

50 Schoolhouse Ln., Portsmouth RI 02871 USA

Tel (401) 683-9700 • Fax (401) 683-5571 • e-mail: ims@ims-resistors.com • www.ims-resistors.com