



FEATURES

ITEM	SPECIFICATION
Operating Temperature:	-55°C to +150°C
Maximum Working Voltage:	$\sqrt{P \cdot R}$
Resistance Tolerances:	±1%, ±2% or ±5%
Attachment:	Solder



- High stability thin film resistor element
- 99% Al₂O₃ substrate material
- 100% matte tin terminals
- Nickel barrier layer
- Tolerances to ±1%
- Passivation of resistor element

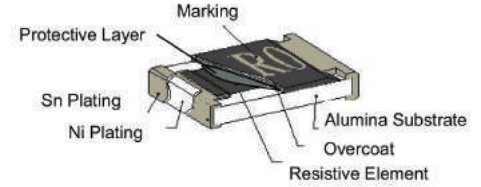

Part	Length	Width	Height (max)	T1	Rated Power @ 70°C
LCI-0402	0.039±.002	0.020±.002	0.017	0.008±.004	63mW
LCI-0603	0.063±.004	0.031±.004	0.022	0.012±.008	100mW
LCI-0805	0.079±.006	0.049±.006	0.026	0.016±.010	125mW
LCI-1206	0.120±.006	0.061±.006	0.026	0.016±.010	250mW
LCI-2010	0.197±.008	0.096±.006	0.030	0.020±.010	750mW
LCI-2512	0.250±.008	0.124±.006	0.028	0.022±.010	1W
LCI-1225	0.122±.006	0.248±.006	0.041	0.022±.010	3W

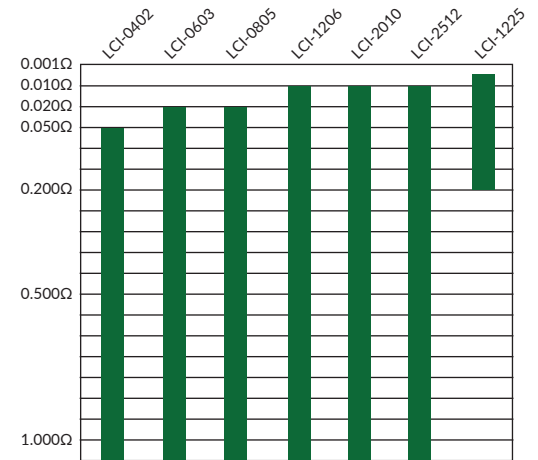


Resistance Ranges

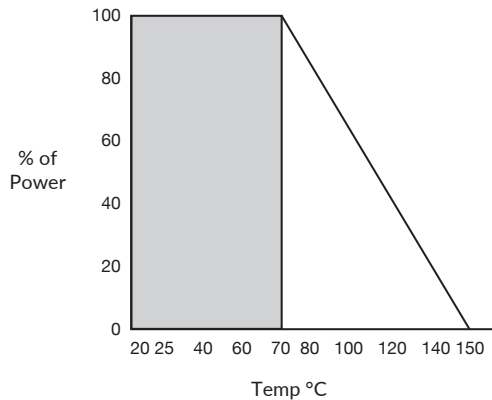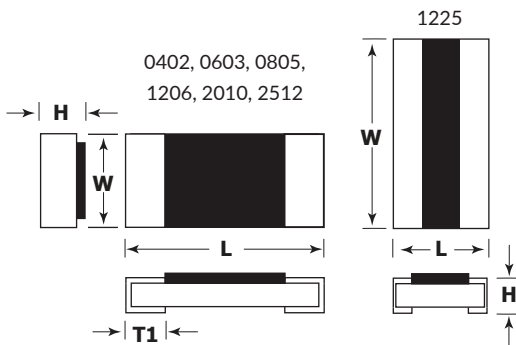

ORDERING INFORMATION


Example: 0402, 63mW, 0.101Ω, 1% resistor with Nickel Barrier terminals

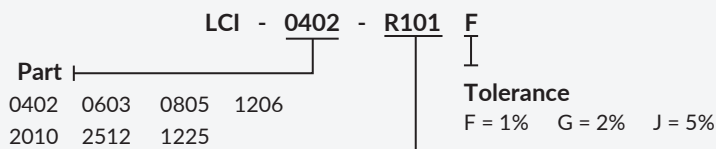

Resistance Value |-----|

Highest resistor value is 1Ω (1R00). For values below 1Ω use 'R' to indicate a decimal point before resistance value.
For example: 0.101Ω is noted as R101, 0.05Ω is noted as R050.

Terminal Style

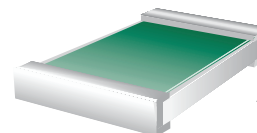

WA - Full Wraparound terminals with nickel barrier layer

T=Tape and Reel
RoHS Compliant =

RoHS LOW TCR